



Schools Issue

ACCESS COVERS & DRAINAGE SYSTEMS

Hot Dip Galvanized Recessed Cover

Recessed Access Covers for Tiles

- ▶ Galvanized mild steel
- ▶ Recess to fit tiles up to 12mm
- ▶ Keyhole lifting device
- ▶ Double grease seal (grease extra)
- ▶ Screw down locking system (optional extra)
- ▶ Non standard dimensions made to order

T-Range



- ▶ Galvanized mild steel cover with polypropylene frame
- ▶ Internal or external use
- ▶ Ideal for variety of floor coverings (tiles, screed, carpet, etc.)
- ▶ Sealed & locking
- ▶ Integral lifting key

Hot Dip Galvanized Heavy Duty Recessed Cover



- ▶ Galvanized mild steel
- Recess to fit 65mm 85mm paving brick
- ▶ Keyhole lifting device
- ▶ Locking available (optional extra)
- Double grease seal (optional, grease extra)
- Non standard dimensions made to order

Cadrotrap Alu



- ▶ Aluminium
- ▶ Double neoprene seal (odour and watertight)
- ▶ Anti-tightening system
- ▶ Lifting keys
- ▶ Locking
- Non standard dimensions made to order



Square-To-Round Recessed Cover

Recessed Access Covers for Paving Bricks

- ▶ Galvanized mild steel cover with polypropylene frame
- ▶ Simple connection to all major PPIC Chambers
- Quick and easy to install
- ▶ Integral lifting key

Pre-Galvanized Cover




- ▶ Pre-Galvanized steel cover with polypropylene frame
- ▶ Various domestic uses

Special Multi-cover




- ▶ Galvanized mild steel
- ▶ To accommodate bricks up to 80mm or concrete fill
- ▶ Lifting eye
- ▶ Utility marking (optional extra)
- ▶ Locking (optional extra)
- Non standard dimensions made to order

Hot Dip Galvanized Cover



- ▶ Galvanized mild steel
- ▶ Various load classes available
- Double grease seal (optional, grease extra)
- ▶ Locking device (optional extra)

Assist Lift Cover

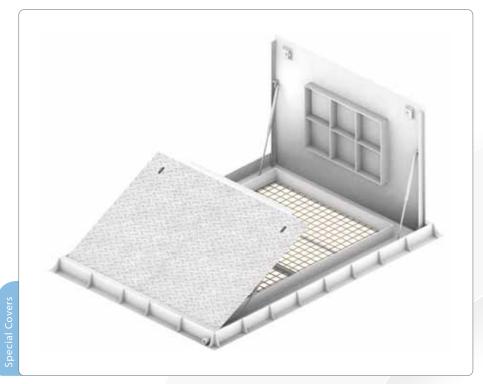

- ▶ Galvanized mild steel
- ▶ Flush fitting solid chequer plate top
- ▶ Removable brace (optional extra)
- ▶ Locking (optional extra)
- ▶ Seal (optional extra)
- Non standard dimensions made to order


Customised Steel Cover



- ▶ Galvanized mild steel
- ▶ Locking (optional extra)
- ▶ Seal (optional extra)
- ▶ Various load classes available
- Non standard dimensions made to order




Solid Top Ductile Iron Covers and Frames



- ▶ Kitemarked to EN124 B125/D400
- ▶ Closed keyways
- ▶ Sealed
- ▶ Locking (on selected covers)
- ▶ Hinged & locking (on selected covers)

Dished Gully Grate



- ▶ Ductile iron gully grate and frame
- ▶ Kitemarked to EN124 C250
- ▶ Side hinged
- ▶ Locking

End Hinged Gully Grate




- ▶ Ductile iron gully grate and frame
- ▶ Kitemarked to EN124 C250
- ▶ End hinged
- ▶ Locking

End Hinged Gully Grate



- ▶ Ductile iron gully grate and frame
- ▶ Kitemarked to EN124 D400
- ▶ HA104/02 Compliant
- ▶ End hinged
- ▶ Anti-theft captive hinge
- Non-rock wedge seating

RECYFIX® GREEN Standard




- ▶ Loading capacity 200 tons/m²
- ▶ Turf finished surface area of 90%
- ▶ Stengthens filtrated surfaces
- ▶ Protects against erosion
- ▶ Weather resistant
- ▶ Quick and easy to install

Application areas

- Green areas open to occasional traffic
- Car parks

RECYFIX® GREEN Super



- ▶ Loading capacity 400 tons/m²
- ▶ Extremely robust
- ▶ Stengthens filtrated surfaces
- Suitable for different filler materials
- ▶ Protects against erosion
- ▶ Quick and easy to install

Application areas

- Parking areas for cars, lorries and buses
- Storage and exhibition spaces
- ▶ Fire engine access

GALVACOAT®



- ▶ One coat paint system
- $\blacktriangleright \ {\it Specifically designed for Hot Dip Galvanized steel}$
- ▶ Available in all RAL & BS colours
- ▶ Suitable for all spray and brush applications
- ▶ Simple and quick to apply
- ▶ Also Available Touch up Galvanizing spray and Touch up Galvanizing primer

Slotted Channel



- ▶ Slotted drainage channel to suit blocked-paved areas
- ▶ Hardly visible, an attractive option for pedestrian areas
- ▶ High drainage capabilities





400® CHANNELS



- ▶ Polypropylene channel for domestic and pedestrian uses
- ▶ Very easy to transport and install
- ▶ Flexibility in design and application
- ▶ Different gratings available

POLYMER PEDESTRIAN CHANNELS



- ▶ Domestic channel drainage
- ▶ Polymer concrete construction
- ▶ A15 loading
- ▶ Heelsafe galvanized grating
- ▶ Shallow profile (90mm)

436® CHANNELS



- ▶ Thermoplastic channel system
- C250 nylon grating
- ▶ Unique quick fit 'Catchlock' system
- ▶ Narrow slot grating
- ▶ Non-corrosive design
- ▶ Lightweight for easy manual handling
- ▶ Eliminates breakages

POLYMER COMMERCIAL CHANNELS



- ▶ Traditional polymer concrete channel
- ▶ Range of gratings from A15 to F900
- ▶ Pre-sloped or constant depth
- ▶ Bar & Bolt and 'Catchlock'

RECYFIX® Channels



- ▶ Recycled Polypropylene Channel drainage system
- ▶ Extremely versatile
- Light and easy to use
- ▶ Various grating options available
- ▶ For installation in houses, gardens, pedestrian and car trafficked areas

FASERFIX® Channels



- ▶ Glass fibre reinforced concrete channel
- ▶ Strong, solid and versatile
- ▶ For all trafficked areas to F900
- ▶ Side-Lock boltless locking system
- Many different grating options available

SPORTFIX®



- ▶ Comprehensive product range for sports facilities
- ▶ Channels made of recycled PE-PP
- A number of options for draining surfaces and tracks
- ▶ Product meets international standards

RECYFIX® HICAP®



- ▶ High Capacity drainage system
- ▶ Suitable for all load classes
- Quick and easy to install
- Highly efficient
- Cost savings in the overall installation
- ▶ No separate gratings

Application areas

- ▶ Airports
- Car parks, Dockyards
- ▶ Industrial/ commercial areas
- ▶ Pedestrian areas
- ▶ Port installations
- ▶ Power stations ▶ Supermarkets

Galco

GALCO STEEL LTD

Galco House | Ballymount Road Walkinstown | Dublin 12 | Ireland Tel: +353 [0] 1 424 7000 Fax: +353 [0] 1 424 7001 Email: sales@galco.ie