

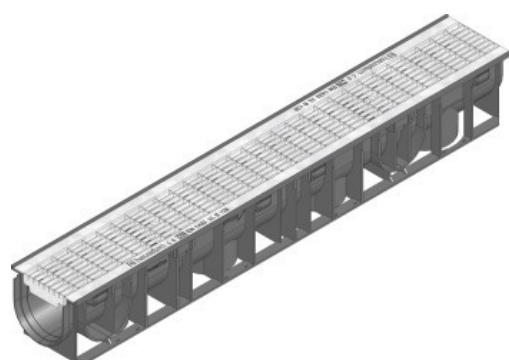


RECYFIX®STANDARD 100

RECYFIX®STANDARD 100, class B 125, Type 01 with mesh grating MW 30/10 mm, galvanised, locked

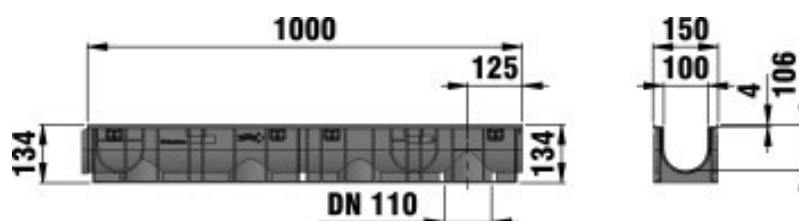

B 125



■ Technical data:

Length mm	Width mm	Height mm	Weight kg	Inlet cross-section cm ² /m	Internal channel cross-sect. cm ²	Inlaying depth	Item-no.
1000	150	134	5,05	650	92	25	41220

■ Product description:

RECYFIX STANDARD 100 type 01 - channel made of modified PP, according to EN 1433, with vertical connection possibility DN/OD 110, with mesh grating, mesh width 30/10, galvanised, loading capacity from A 15 - B 125, with locking device, L/W/H 1000x150x134 mm, item no. 41220

■ Material:

- **Channel body:** modified Polypropylene
- **Bolts:** Electrogalvanised steel
- **Locking handle:** RECYFIX Material (recycled PA)
- **Grating:** hot-dip galvanised steel

■ Type acc. DIN EN 1433:

M

■ Set of rules:

DIN 19580/EN 1433

■ Application areas:

- Railway platform
- Facade drainage
- Flat roofs, terraces and balconies
- Pedestrian zones
- Gardening and landscaping
- Multi storey car parks



- Market squares, markets
- Public areas and squares
- Cityscapes with architectural value
- Cycle paths and footpaths
- School yards
- Underground car parks, multi-storey car parks
- Access drives private

The optimal use of the product in the aforementioned applications depends on various factors (positioning, traffic load and frequency,...). Our experts will be happy to advise you!