

FLEXUS RD600

Class D400

FEATURES		OPTIONALS		INSTALLATION AREA
----------	--	-----------	--	-------------------



HINGED



SAFETY
LOCK
BACKSTOP



ADDITIONAL
CLOSURE
DEVICE



CUSTOMIZED
MARKINGS





GROUP 4 and/or
LOWER



Applications

Carriageways of roads (including pedestrian streets), hard shoulders, and parking areas for all types of road vehicles.

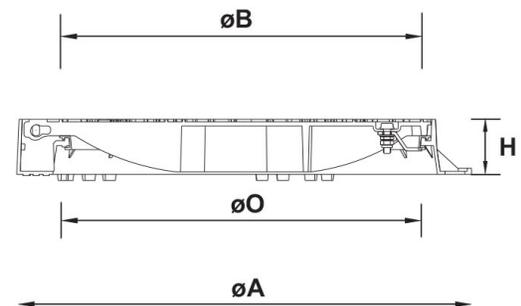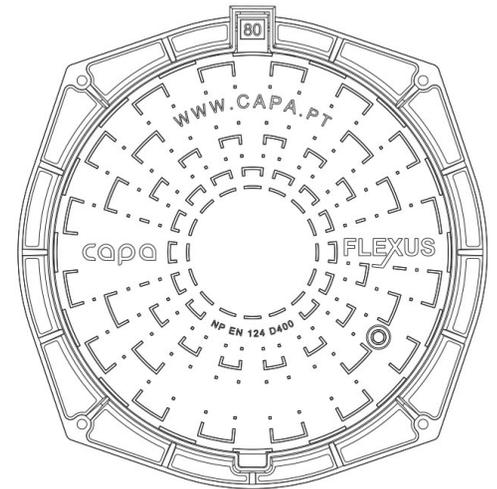

Ref.	Modelo	Ø A	Ø B	Ø O	H	Classe
922123	600	800	610	600	100	D400


Features

- Cover made of spheroidal graphite cast iron (ductile), according to EN-GJS-500-7 EN1563;
- According to EN 124:1994, load class D400;
- Hinged cover and upright removable;
- Safety lock backstop at 90°;
- Requires no special tool to be operated;
- Locking bar by elastica in FFD;
- Equipped with elastic joint anti-noise;
- Black painting for corrosion protection;
- Raised pattern non-slip surface;
- Optimized frame for plumbing the device and set the surrounding concrete;
- Cover and frame mechanized to ensure a perfect union.

Options

- Additional closure device to protect unauthorized opening;
- Custom markings according to customer requirements.

Additional locking system (Optional)

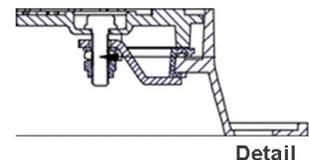

Detail